

🔏 leapfrog i works

Leapfrog Works 2024.1

new release



Leapfrog 2024.1 Release Notes

Leapfrog 2024.1 is a strong release that continues to deliver a balanced mix of new functionality and enhancements to our core tools and workflows. There is a lot for everyone in this release, and we urge you to read the release notes in detail and watch our highlights video, in order to discover the tools that will enhance your work.

In the background, we are also working hard on laying the groundwork for connecting our desktop products to our rapidly evolving cloud ecosystem – with new schemas for cloud native data storage, cloud based-data management and computation services and the cloud infrastructure to support permissions and role-based access all in the pipeline. Work on componentising our core libraries and supporting connection to cloud is well underway.

Tight integration between our immersive desktop modelling solutions and the flexibility and power of cloud data management and compute will unlock a world of hybrid workflow opportunities.

Table of Contents

1.	Features and Functionality					
	1.1.	Multiple Instances Of Leapfrog	4			
	1.2.	Drilling Data 1.2.1. OpenGround Integration	5 5			
		1.2.2. Survey Data	5			
		1.2.3. Data Statistics	5			
		1.2.4. Custom Columns	6			
		1.2.5. Interval Selection 1.2.6. Data Export	6 7			
	1.3.	Core Photo Links	8			
		1.3.1. Imago	8			
		1.3.2. Kore	8			
	1.4.	GIS Data	8			
	1.5.	Coordinate Reference System Integration	8			
	1.6.	Polylines with Attributes	9			
	1.7.	GOCAD TSurf Visualisation	9			
	1.8.	Mesh	10			
		1.8.1. Surface Values	10			
		1.8.2. Set Surface Orientation From Plane	10			
		1.8.3. Off-Surface Value Usage Improved For All Input Data	10			
		1.8.4. Extract Dip And Azimuth From A Mesh	11			
	1.9.	Vein Modelling	12			
	1.10.	Volume Attributes Table	13			
	1.11.	Numeric Modelling	13			
	1.12.	Alignment Chainage On Plans And Cross Sections	14			
	1.13.	Detect Block Model Definition On Import	14			
2.	Leapfrog Support Of Bentley Accounts And Entitlements					
	2.1.	License Provider Selection	15			
	2.2.	2.2. Job Codes In Projectwise				
3.	User Interface And Interaction					
	3.1.	3.1. Object Selection Dialog				
	3.2.	. Central Projects Tab				
	3.3.	Project Tree Status	16			




4.	Version Update Resulting In Changes				
	4.1. Compiler Change	17			
	4.2. Evaluation Onto Missing Intervals	17			
lss	sue Summary - Point Release 2024.1.1	18			
lss	sue Summary - Point Release 2024.1.2	19			
lss	sue Summary - Point Release 2024.1.3	20			



1. Features and Functionality

1.1. Multiple Instances Of Leapfrog

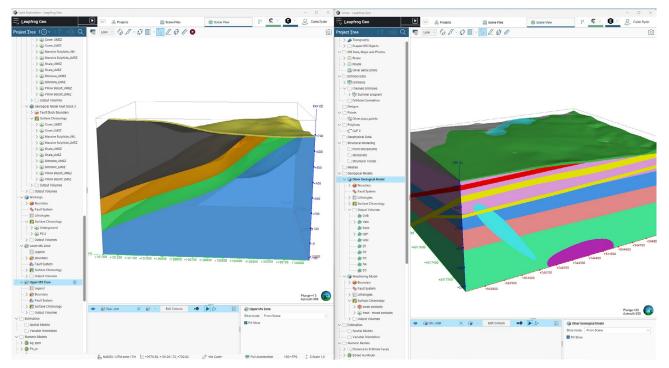

Multiple instances of Leapfrog 2024.1 can be run simultaneously by one user on the same machine. This allows greater flexibility regarding ways of working; open and process one project while actively working on a different project!

Please note, because the instances are being run on a single machine, the processing speed and performance is still limited by the capacity of your machine's hardware.


1.2. Drilling Data

The importance of drilling data to underground modelling cannot be overstated, as drilling provides the direct physical observations and sampling on which subsurface models are based. The high cost and value of drilling means that obtaining maximum value from this data remains a focus for Seequent. In Leapfrog 2024.1, several significant enhancements and new capabilities will improve the visualisation and analysis of data derived from drilling methods.

1.2.1. OpenGround Integration

OpenGround, Seequent's cloud-connected geotechnical database management and reporting solution, is now available via an integrated connection in Leapfrog Geo and Leapfrog Energy. For projects created from a mix of drilling data sources, the ability to import directly from industry standard databases is a crucial requirement.

1.2.2. Survey Data

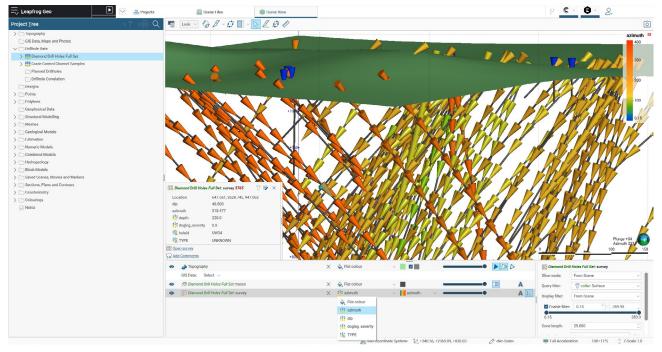

Hole orientation information from downhole surveys is critical to determining the path of a drillhole. Survey data locations can now be visualised in the 3D scene as orientated cones, providing rapid visualisation and validation. Cones can be coloured by azimuth, dip and dogleg severity using the same colourmap and labels display options available as for any other type of data. Scene filtering on the display or selected column allows for optimal flexibility when viewing the data in 3D.

Standard table functionality has been added to provide adaptable analytic capabilities. Create query filters, add new category columns from survey data and evaluate modelled volumes and/or category columns from other tables onto survey measurement locations. The flexibility of viewing complementary information on survey measurements allows you to better understand your ground conditions, for example, what lithologies consistently result in higher rates of dogleg severity or deviation and in what direction.

1.2.3. Data Statistics

The box plot interface now includes a handy statistical summary table of the selected numeric column for each category, giving a quick and compact view of data insights. Graph axes have been swapped so that the boxes are vertical, conforming to standard reporting formats.

A new button opens the detailed statistics table view, with the settings from the box plot tab, e.g. the numeric and categorical column selection, automatically applied. Finally, the data from the statistics table can be copied to the clipboard for when you need to do more involved data analysis outside of Leapfrog.

5


1.2.4. Custom Columns

A simple but useful action is the rename and copy of items in the project tree. Incrementally, this basic functionality is being extended to be consistent across more of the project tree.

Leapfrog 2024.1 allows grouped lithologies and category selections to be renamed, and the following items can now be copied:

CUSTOM COLUMN	AVAILABLE ON
Category From Numeric	Interval, downhole point and structural data
Category Selection	Collar, downhole point and structural data
Group Lithologies	Interval data
Interval Selection	Interval data
Split Lithologies	Interval data

1.2.5. Interval Selection

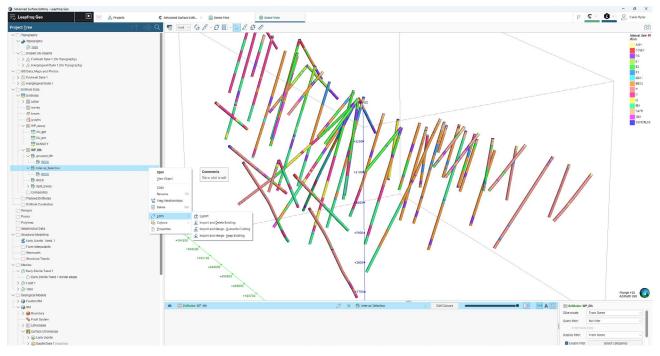

Interval selection is a critical step in creating model ready data. Several developments have been completed for this version of Leapfrog.

In Leapfrog 2023.2, the export of interval selection edits was enabled. In this version, you can now import interval selection edits enabling you and your team to share interval selection between projects and model with the same, most up to date set of interval selections. Edits can be imported using one of three options:

- · Import new edits and delete all existing edits.
- Import new edits, merging new with existing edits, and overwriting any existing edits where the hole_id, from and to are in both existing and new with the new lithology.
- Import new edits, merging new with existing edits, and keeping any existing edits where the hole_id, from and to are in both existing and new and ignoring the new edit.

If any edits are rejected or ignored, for example, when using the 'keep existing' merge strategy, these edits are written to a file, and you will be informed via an information dialog with a clickable link to access the file.

An additional enhancement to the interval selection functionality means you can select individual intervals even if they share the same lithology with adjacent intervals. Previously, you could only select the entire set of intervals if lithologies were shared. To select at a finer increment required you to switch the view to a different item, which was cumbersome. This new functionality provides you with much greater flexibility to generate the interval selections you require.

1.2.6. Data Export

Another enhancement to drilling data is the ability to export and/or flag ignored rows. These options are available when exporting point data, drilling data (including downhole points and downhole structural data), and structural data. A simple addition but crucial for working collaboratively in teams where QA/QC decisions need to be communicated and shared, to keep an audit trail and ensure everyone is working with the same data.

SExport Drillhole	Data		:
Export Drillhol Export Options	es 1		
Query Filter:	<none></none>		
 <u>All rows in t</u> Changed ro 		Use <u>o</u> riginal column names Add changed <u>f</u> lags	Add interval start points Add interval mid points
 Valid rows only Ignored rows only 		Invert dip values Export trench column	Add interval end points
		Add ignored flags	
?		Cancel	<u>E</u> xport

Two new options: Ignored rows only and Add ignored flags.

On export, the default names of drillhole *.csv files had to include a base file name. This is no longer the case. Now, when exporting your drilling information, you can omit the need for the base file name meaning re-importing this information is much easier by better matching the names of the tables already in the project.

Eolder:	C:\Users\	ryanlee\Leapfrog Projects	2
Base file name:			
Name	File N	Ceapfrog Geo X	
collar	C:\U		
survey	C:\U	Base File Name Required	
Leda_Geology	C:\U	Please enter a base file name.	
Leda_Samples	C:\U		
		<u>o</u> k	
		Cancel	Export

Previous versions of Leapfrog enforced a base file name.

Drillhole traces can be exported as lines in *.dxf, *.dgn or *.dwg formats. A very common request for a generic export of the trace for the purposes of grout status categorisation, engineering and survey safety checks and other downstream processes both within and external to Leapfrog. Small on the face of it, this enhancement will save you time and effort previously working around this limitation.

7

1.3. Core Photo Links

1.3.1. Imago

With Imago now supporting Seequent ID, both applications have a common license provider meaning a smoother integration is now possible. Leapfrog can make requests and receive information that is far more relevant to you, the user. For example, instead of having to choose from 15 imagery types, only the types you have configured in Imago will appear in this list.

And, instead of having to manually type Workspace and Dataset names, drop-down menus will be pre-populated with a relevant list of items from which to choose. These efficiencies mean fewer chances for human error; no more spelling mistakes setting you back a step in your workflow and no more having to remember the precise names of items.


1.3.2. Kore

Leapfrog 2024.1 has updated the Kore deep link so that clicking on core photography links will open Kore's cloud application (rather than the desktop application).

1.4. GIS Data

As part of a bigger initiative to improve Polylines, the importing of GIS polygons has been sped up and improved in certain circumstances. Previously, Leapfrog was not able to handle overlapping polygons. In Leapfrog 2024.1 this has been resolved.


1.5. Coordinate Reference System Integration

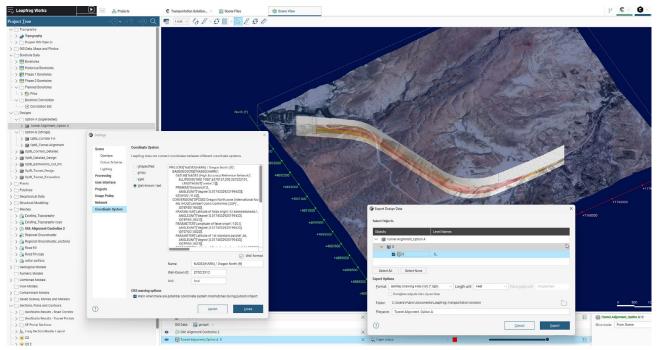

In Leapfrog 2024.1, provide additional information on the Coordinate Reference System (CRS) of your project. Benefit from improved data handling and provide clearer and more usable CRS information when transferring data.

The new CRS options include Unspecified, EPSG and ESRI codes, and also Well-Known Text (WKT) options. For specific ESRI/EPSG codes, when available, the local datum transform of the projected coordinate system can be adjusted.

1.6. Polylines with Attributes

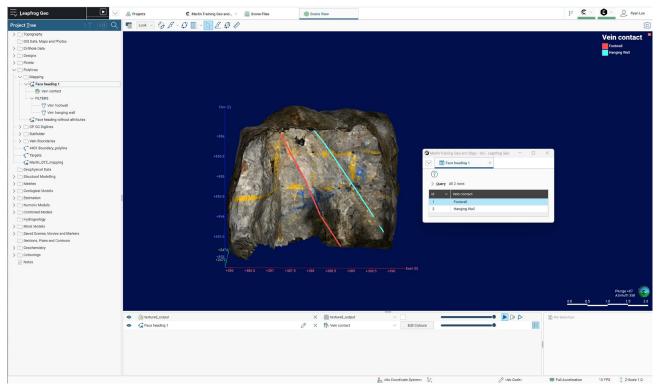

Leapfrog 2024.1 can now support attribution of polylines. The ability to import and set different types of attribute data such as category, text, numeric, date and timestamp will enable numerous new uses and modelling opportunities that were previously impossible.

Attributed data can be imported using the *.csv file format and category attributes can be created within Leapfrog itself. Attributes can be visualised in the 3D scene as well as in a table, and all polyline geometry editing behaviour has been maintained. You can create query filters based on the polyline attributes and use these query filters on any objects in Leapfrog where polylines are an input. Polyline attributes are also maintained when a polyline is converted to a GIS line and vice versa. The editing of imported attributes is currently not supported, however, this first phase has laid the groundwork for further development. Similarly, while attributes must currently apply to the whole polyline path, other levels of attribution (nodes and segments) can be developed in future versions if the need is demonstrated.

Polylines are a fundamental data type and unlocking the richness of attributed data is a significant advancement, that has benefits for mapping, modelling and classification workflows.

1.7. GOCAD TSurf Visualisation

GOCAD TSurf gridded surface files support numeric attribution, however, previously Leapfrog did not retain this data on import. In Leapfrog 2024.1, this has been enabled, so that numeric attributes on mesh vertices are retained on import.

1.8. Mesh

1.8.1. Surface Values

In Leapfrog 2023.2, a change was made to Deposit and Erosion surfaces to expose the 'control points' that are used to construct these surfaces, and to modify the way edit information is incorporated into them. In this release, the same change has been applied to surfaces in the meshes folder that are built from point data, vein segment mid points and structural data.

The surfacing points that are automatically created from input data in order to control the surface have been exposed in the project tree and can be visualized in scene. The following categories can be visualized:

- Point contact
- Polyline/Structural contact
- · Off-surface

"Merged distance" values are also assigned to each surface value and are interpreted as follows:

- Contact points = 0
- · Off-surface points = any other values

Viewing surface values by category and/or by merged distance values can illuminate the factors controlling and influencing your surface. This in turn helps to understand the relative influence of your data, for example the effect of adding a polyline or structural disk on the surface compared to point data alone. Become a more powerful modeler by understanding and exploiting the modelling tools proficiently.

1.8.2. Set Surface Orientation From Plane

When input data has no obvious orientation the off-surface point generation routines are not viable. This new option, which has been added to the "edit mesh" dialog, allows you to provide some assistance to the surface point generator by specifying the surface orientation using a plane.

1.8.3. Off-Surface Value Usage Improved For All Input Data

Before Leapfrog 2024.1, the off-surface control points for meshes built from point data inputs only were generated using normals estimated from those points. If these surfaces were then edited using polylines (with orientation) or structural data, the previously calculated off-surface points were discarded, and replaced with off-surface points calculated normal to the edits. This could result in locally large changes to surfaces when edits were applied. In this release, a new option has been added to the "edit mesh" dialog to combine both sets of off-surface points.

1.8.4. Extract Dip And Azimuth From A Mesh


Advanced Surface Editing - Leapfrog Geo			- 0 ×
🗮 Leapfrog Geo 📃 🕑 💡	🐣 Projects 🧟 Advanced Surface Edit 🛛 🔤 Scene Files	Scene Vlew	H C · B · Q. Caleb Ryder
ProjectIree	of old Q 🧧 🚥 🖓 🖉 🖬 🖓 🖉	00	0
	The second s		and the second secon
- V 🗋 Draped BIS Objects	and the second	an week wat had been with the manufacture of the second second second second second second second second second	the part of the of the transfer of the second second second
-> A Footwall Dyler 1 (On Topography)			
- > A Hangingwall Dyke 1 (On Topography)			
V [] GIS Data, Maps and Photos			
-> S Footwall Dyke 1			
-> 📇 Hangingwall Dyke 1			
V Dilhole Data			
- > 🏥 Dritholes			
Planned Drillholes			化合适应 医颈腔 经代表法律委托 网络中心学校 经资本分析
Drithole Correlation			(2) 《书》的书题:书题:"书题:"书》:"书》:"书》:"书》:
Deskgros			
C Points			COMPACT CONTRACTOR CONTRACTOR
C Polylines			
C Geophysical Data	and the second		
V C Structural Modelling			
S Early_Diorite_Trend_1			
Form Interpolants			
Stereonets			的复数形式 化化学学 化化学学 化化学学 化化学学 化化学学
Structural Trends	and the second second second second second second	🚱 Extract Structural Data 🛛 🕹	and the second
V [1] Meches			
	AND SALES AND AN AND AN AND AN AND AND AND AND AN	Extract structural data from: Early Diorite Trend 1	
Cr Early Diorite Trend 1 border edges		Line triaged mean	
> @r Fault 1		🖬 Ignore edge briangles	
> @ Topo		Name: Early, Diority, Trend, 2	
		Taxue rail@outure.taurer	
Geological Models			
> 🍘 Faulted GM		Cancel DK	
✓ () GM			
> 🥪 Boundary			
🍫 Fault System			
- > III Lithologies			
- 🗸 🕎 Surface Chronology			
- > 🥡 Early Diorite			计可以认为 计分子 化分子 化分子 医外支 化分子分子
> 😂 Dacite Dyke 1 (inactive)	and a second		
> Output Volumes			
C Spatial Models			
Variable Orientation			
Numeric Models			
Combined Models	the second s		
Hydrogeology			a da ser a constructiva de la construcción de la construcción de la construcción de la construcción de la const
Block Models			Tubos Aiz Atimuti 297, 📿
Saved Scenes, Movies and Markers			
Sections, Plans and Contours		× Q Fiat colour V III	Early Diorite Trend 1
	S Larly_Diente_Trend_1	🖉 🗙 🖕 Flat colour 🚽 🖬 🖬 🛶 🛶 🖬	Thick v Sice mode: From Scene v
Geochemistry Gioda3 [not connected]	· Sent Provide Lines		
			Display filter. From Scene ~
∼ [[™]] Colourings			
- > [_ Colour Gradients			
Shared Colournaps			
(z) Notes			
		2. dia constante Systems 12 + 4455322 37 + 420012 10 + 2132 99	A dea Codes

A new "Extract Structural Data" workflow generates a structural measurement (dip and azimuth) for every triangle in a mesh, directly. This omits the need to first extract vertices and subsequently "Estimate Structural Data" (note that the existing "Estimate Structural Data" functionality has been retained).

The new option is available on most meshes in the project tree. An option has been provided to excluded triangles that touch the boundary of surfaces, to avoid biasing outputs with small marginal triangles. The extracted data can be viewed as structural disks in the scene, or used in stereonet analysis.

Extracting structural measurements from meshes with more than 250,000 triangles has been restricted due to the time taken to write the information to the database. This can be reviewed in future iterations.

1.9. Vein Modelling

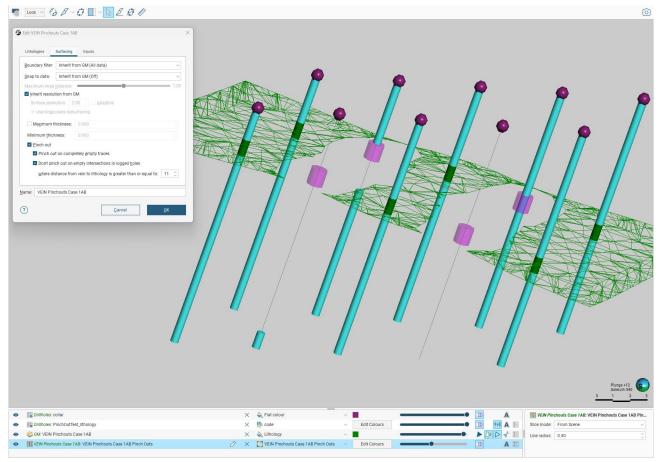

A small yet important update to the vein modelling tool allows pinch-outs on empty intersections that occur in otherwise logged holes. An additional option has been added to the surfacing tab of the editing dialog so that you can control if/when you invoke a change to your modelling strategy. No changes will be enforced to existing vein models.

1.10. Volume Attributes Table

An existing feature of Leapfrog allows a 'volume attributes table' to be created and updated for any geological or numerical model, and properties to be manually assigned to each volume. Attribute tables provide a means to enrich the model volumes with information about ground conditions that can be transmitted to downstream users: for example to slope stability analysis as well as other operational analyses.

A handful of small, but notable improvements have been made to this table to make it easier to use and export via *.ifc (International Foundation Class) and *.lfm (Leapfrog Model File) formats. The geologist can now rearrange the columns and edit multiple cells at once for faster attribution and updates. An "Edit Attributes" link has been added to the in-scene information box making it quicker to move from the scene to the table for review and edit.

This work is preparatory to further planned improvements to volume attribution.


🕨 🐼 Projects C · O · 2, Leapfrog Geo Scene File -6 8-00-020 0 ect Tree GIS Data, Maps and Photo 🚱 Edit RBF Inti Drillholes Drillholes Collar Value Tran Collar Collar Collar Collar Collar Composition Composition Values To Inte Numeric Valuer HI A Query Filter Surface Filte tt c Object Value × m Au 📀 Combined Models 0 Ganoel Saved Scenes, Movies and Marker Sections, Plans and +4317100 Colourings Notes 🌰 Au: < 0.08 A. lan Au: > 0.66 0 au: 0.08 - 0.24 Isosurface colou A From Scen • 🌰 Au: 0.24 - 0.66 k Isosurface colou Au Fill Silos 10 Au: > 0.66 A | Display filter A «No Cos ordinate System> 🛃 19 -110 49 FPS 🔅 Z-Scale 1.0

1.11. Numeric Modelling

Leapfrog 2024.1 introduces the option of changing the data source for numeric models after their creation. With this update, you can easily switch the input of numeric models (RBF interpolant, multi domain interpolant) without the overhead of rebuilding the entire model. This will most commonly be used in conjunction with copying of numeric models.

Other small enhancements include creating a copy of multi-domain RBF interpolants and distance function models and show warning overlays on volumes where an error is detected.

1.12. Alignment Chainage On Plans And Cross Sections

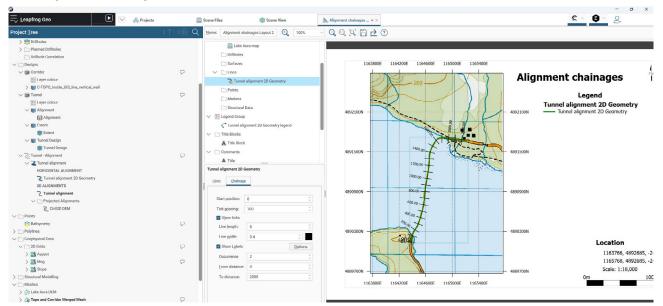

Alignment chainage can now be displayed on Plan Views and/or Cross Sections. This will improve understanding and communication about relative positions along alignments on the plan, cross section, and in the 3D scene.

Previously, you were able to add alignments to plans and regular sections, as well as to the strip view within sections. With Leapfrog 2024.1, you can now also display the chainage distance along your alignment. Display options include start position, tick spacing, tick length and width, label text/number formatting as well as label density,

The scene view display of alignment (both 2D/3D) has also been improved to allow you to configure the chainage start point and the number of decimal places to display. The existing spacing and occurrence parameters remain unchanged. Intercept and clipping options are available for cross sections, but not for plan and strip view.

Chainage distances are not yet available to use on long sections.

1.13. Detect Block Model Definition On Import

Importing regular block models into Leapfrog without a block model definition file is now easier. If all centroids of the block model are included within the file, Leapfrog will determine the model definition directly from the file and pre-populate the required fields automatically.

2. Leapfrog Support Of Bentley Accounts And Entitlements

2.1. License Provider Selection

When you first launch Leapfrog, you may be prompted to sign in to your license provider and select your license.

If you have installed previous versions of Leapfrog on your computer, Leapfrog 2024.1 will detect the license provider you have been using to sign in and will not prompt you to choose a provider.

If Leapfrog hasn't previously been installed on your computer, you will be prompted to choose which license provider you will be using:

📽 Leapfrog Version 2024.1.0 X				
-	Which type of licence do you want to use?	_		
•	SEEQUENT Sign in with Seequent ID To use licences associated to your Seequent account.			
0	Bentley Sign in with your Bentley account To use licences associated to your Bentley account.			
Reme	ember my choice			
?	Quit <u>G</u> et Started			

Which options are available to you depend on which Leapfrog product you have a license for:

- If you are licensed for Leapfrog Works, select your license provider and sign in as described in either Signing in With Seequent ID or Signing in With a Bentley Account.
- If you are licensed for Leapfrog Geo or Leapfrog Energy, choose the Seequent ID option. Signing in via a Bentley account is not supported for Leapfrog Geo and Leapfrog Energy. See the Signing in With Seequent ID topic.

Whichever product you are licensed for, enable Remember my choice if you do not wish to be prompted to choose a license provider each time you launch Leapfrog.

2.2. Job Codes In Projectwise

Leapfrog Works projects can be associated to or disassociated from a ProjectWise code. The ProjectWise portal can be opened directly from the profile drop-down menu at the top right-hand corner of the Leapfrog user interface.

3. User Interface And Interaction

3.1. Object Selection Dialog

= Leapfrog Geo	2 Projects	Scene Files	Scene	View		9 C D D
Project Iree		Look v là B v 1	7 . 8 0	D		0
Project I ree 6 Projec	Edit Reputer Block Mc Edit Reputer Block Blocks Blocks Blocks Blocks Blocks Blocks Bounders nige: Admutic Dip: Ptjot:	Yreportions Yreportions X X 0 0 0 0 0 0 0 0 0 110 × 100 × 80 + 880,000	Y Y <thy< th=""> <thy< th=""> <thy< th=""> <thy< th=""></thy<></thy<></thy<></thy<>	2 0 10 0 1270.00 0 800.00 Enders Set Angle	C C C C C C C C C C C C C C C C C C C	
	•	Marite Model		+2500	Construct System C + 270.51, -2028,10, +129.56 C + 00 costs	Fast (0) 128 20 278 50 126 20 278 50 126 20 278 50

Previously in Leapfrog, selecting items from the project tree could be difficult and time-consuming when there were a lot of objects in the tree and, by default, the project tree was opened fully expanded.

A new object selection dialog now replaces large drop-down lists, making location and selection of items from the project tree more intuitive and faster. Instead of needing to use keystroke shortcuts, such as Shift + < to collapse the list, you are now presented with a dialogue that allows you to collapse all, expand all and filter the project tree. Filtering is smart and responsive as you type, so you can rapidly home in on items of interest. You can choose whether the list is collapsed or expanded as a default.

Please note, not all lists have been updated.

3.2. Central Projects Tab

The Central projects tab has an updated user interface to improve usability and to better align with best practice design standards.

3.3. Project Tree Status

Status icons on the right-hand side of the Leapfrog project tree have had a couple of minor changes to facilitate scalability and usability.

Where one or more items within a folder had one or more statuses to update, for example, out of date; in error; paused; or frozen, previously a set of icons was used to visually convey this information. This stacked iconography has been replaced by a single icon (\vdots). Hovering over this icon will display a tool tip with details of what statuses are affecting items within the folder.

4. Version Update Resulting In Changes

On occasion, necessary changes made to Leapfrog result in volumes being reprocessed and changes in shape, volumes or some properties are unavoidable. Understanding the impact this has on projects and the time it takes to ratify those changes is important so where possible, updates and consequential changes are communicated. In Leapfrog 2024.1 two such changes were mandatory and are outlined below.

4.1. Compiler Change

All software is subject to unavoidable change and upgrade. In Leapfrog 2024.1. an upgrade to the Intel compiler used in Leapfrog calculations was enforced and necessary. This update brings big performance improvements to certain processing tasks depending on the hardware specifications of your machine.

However, a consequence of this change is that small changes occur to floating point numbers. Most changes are in the >8th decimal place and any effects are immaterial; however, there are some circumstances may result in more noticeable localised changes. An example is in estimation using variable orientation – in rare situations, a minor change in orientation can result in a change to sample selection, and consequently a local different estimate. Extensive testing has shown that any such changes are rare and localised, and global changes to estimates are immaterial.

4.2. Evaluation Onto Missing Intervals

In Leapfrog 2024.1 we made a change to the way evaluated columns are handled when missing intervals are present in a drilling table.

Prior to 2024.1, when a geometry or numeric model was evaluated onto a drilling table, missing intervals received an evaluation result. This could result in some non-intuitive downstream effects, such as differences in the count or length of weighted statistics when imported values are reported against evaluated categories.

From 2024.1 onwards, evaluation results are no longer stored against missing intervals. This is the behaviour that users have told us they expect to see. However, there are some situations where the changed behaviour may result in unexpected outcomes on upgrade.

Note that any rules regarding handling of 'Missing intervals' through the 'Fix Errors' workflow are unchanged. example is in estimation using variable orientation – in rare situations, a minor change in orientation can result in a change to sample selection, and consequently a local different estimate. Extensive testing has shown that any such changes are rare and localised, and global changes to estimates are immaterial.

Point Release 2024.1.1

Leapfrog 2024.1.1, a point release of Leapfrog, addresses critical issues which include issues that, in rare cases, prevent projects from upgrading successfully. These fixes ensure a smoother and more reliable experience for all users.

Issue Summary

	-	
	ISSUE	RESOLUTION SUMMARY
1.	Re-enable 'undo/redo after save' for non-attributed polylines	Re-enables workflows for iteratively assessing impact of polyline edits on models. While this fix is for non- attributed polylines only, a complete fix for attributed lines is planned for a later release.
2.	Error on project upgrade for section layouts that had the same design object evaluated onto both the layout and strip view	Project upgrade issue. The issue is now fixed.
3.	Negative survey dip points down was not set when reloading from acQuire	Resulted in inverted holes unless 'Negative Survey Dips Points Down' was re-selected. The issue is now fixed.
4.	Error when regularising sub- blocked models that had a category column evaluated onto parent blocks	The issue is now fixed.
5.	lssue regularising a block model while using certain numeric calculations as input	The issue is now fixed.
6.	Regularised block model help link was broken	Fixed hyperlink.
7.	Merged table was not updating when parent table intervals were updated	Resolved an issue where the merged table did not dynamically update when its inputs changed.
8.	Error when upgrading projects that had a frozen domain estimator in an error state	Project upgrade issue. The issue is now fixed.
9.	Error when copying custom columns following a table reload	Restored the ability to copy a custom column (such as Category From Numeric) following a table reload.
10.	Error when copying a section layout with markers and strip view to long section	Restored the ability to copy markers from a cross section to a long section.
11.	Error when opening LF Viewer files with large number of shapes	The issue is now fixed.
12.	Error when viewing images draped on topography	The issue is now fixed.
13.	Error importing certain *.dm format meshes	The issue is now fixed.
14.	Error copying a section layout with markers and strip view to long section	The issue is now fixed.



Point Release 2024.1.2

Leapfrog 2024.1.2, a point release of Leapfrog, addresses critical issues which include issues that, in rare cases, prevent projects from being opened successfully. These fixes ensure a smoother and more reliable experience for all users.

Issue Summary

ISSUE	RESOLUTION SUMMARY
Error importing *.mdl files (Surpac block models).	The issue is now fixed.
Extruded mesh: error occurs when the option of "Existing polyline" is left as "select polyline" and the OK button is selected. Furthermore, the project will not reopen if closed.	An upgrade step has been added to remove the broken meshes and allow the project to be re-opened in 2024.1.2.
When Guide Points or Intrusion points are used as an input to a Deposit or Erosion surface "extra" off-surface points are being generated and used erroneously.	These points already contain off-surface points which are now used directly (this is what happens when "Use orientation from all inputs" is off).
Stereonet: the "Category Selection" toolbar is present the first time you enter edit mode on a new or existing category selection. The toolbar is then absent for any subsequent editing. In addition, an error occurs on entering and exiting edit mode.	This issue is now fixed.
acQuire Smart Refresh: only records of holes where the "HOLESURVEY table" has been updated in the acQuire database are being retained in the Leapfrog project. Holes with unchanged records are not being retained, therefore the drilling database in Leapfrog could be missing data post a "Smart Refresh".	This issue is now fixed.
If the user has a specific locale date format selected in their machine's "region settings", they are unable to import drillholes.	This issue is now fixed.
Error copying layouts with a planned drillhole on a strip view.	This issue is now fixed.
Multi Domain RBF interpolant evaluations do not automatically update after material changes to the input data or model settings.	An upgrade step will run on all multi domain RBF models to ensure all evaluations are accurate.
	Error importing *.mdl files (Surpac block models). Extruded mesh: error occurs when the option of "Existing polyline" is left as "select polyline" and the OK button is selected. Furthermore, the project will not reopen if closed. When Guide Points or Intrusion points are used as an input to a Deposit or Erosion surface "extra" off-surface points are being generated and used erroneously. Stereonet: the "Category Selection" toolbar is present the first time you enter edit mode on a new or existing category selection. The toolbar is then absent for any subsequent editing. In addition, an error occurs on entering and exiting edit mode. acQuire Smart Refresh: only records of holes where the "HOLESURVEY table" has been updated in the acQuire database are being retained in the Leapfrog project. Holes with unchanged records are not being retained, therefore the drilling database in Leapfrog could be missing data post a "Smart Refresh". If the user has a specific locale date format selected in their machine's "region settings", they are unable to import drillholes. Error copying layouts with a planned drillhole on a strip view. Multi Domain RBF interpolant evaluations do not automatically update after material changes to the



Point Release 2024.1.3

Leapfrog 2024.1.3, a point release of Leapfrog, addresses critical issues which include issues that, in rare cases, prevent projects from opening. These fixes ensure a smoother and more reliable experience for all users.

Issue Summary

	ISSUE	RESOLUTION SUMMARY
1.	Error encountered when copying geological models often containing vein systems.	The issue is now fixed
2.	Some NVIDIA drivers break Leapfrog's in-scene handles for users with a particular GPU configuration.	The issue is now fixed
3.	Error encountered when deleting an evaluated combined estimator on a frozen block model.	The issue is now fixed
4.	Deleting the domain input of a combined estimator can raise an error when trying to freeze or copy a block model.	This issue is now fixed
5.	Column headers are mixed up on export of copied polyline containing attributes	The export format has been fixed for copied polylines

